






BVBA POMAC-LUB-SERVICES SPRL Korte Bruggestraat 28 B-8970 Poperinge
Tel. 057/33 48 36 – Fax 057/33 61 27 info@pomac.be – internet: www.pomac.be

OIL BRUSHES FOR CENTRAL LUBCRICATION AND OIL DRIPPERS

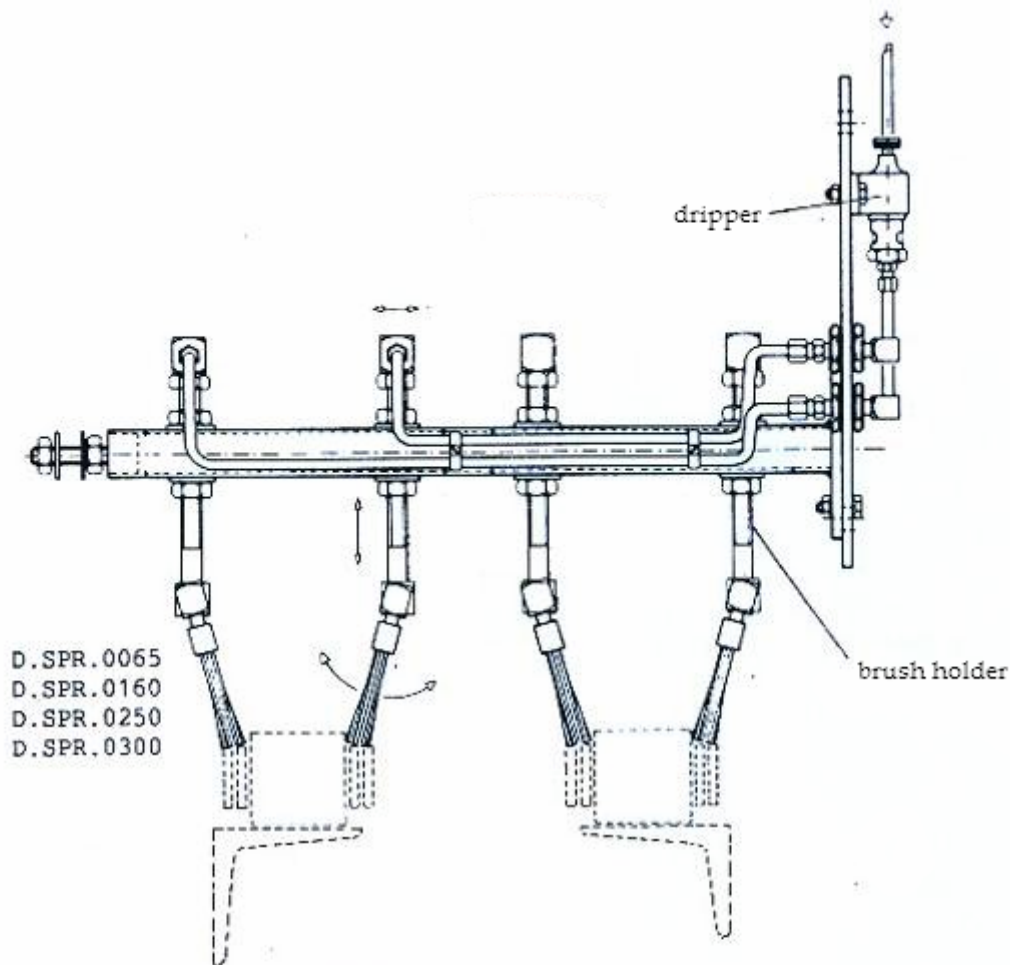

CS.B.30320302

CS.B.30046809

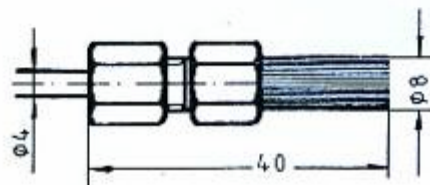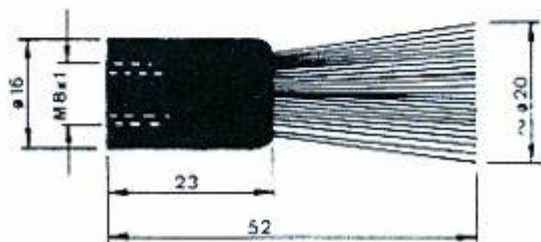


OILBRUSHES

TYPE SPR

Socket of brass or aluminum, perlon bristles up to approx. 70 °C, for higher temperature steel bristles are being used. The corrugated brush bristles maintain the lubricant in the brush, preventing the lubricant from dripping.



Type	A	B	C	Presentation
D.SPR.0065PE	6.5	50	65	perlon
D.SPR.0065ST	6.5	50	65	V2 A-Stahl
D.SPR.0160PE	16	30	53	Perlon
D.SPR.0160ST	16	30	53	V2 A-Stahl
D.SPR.0250BR	25	45	70	Bronze
D.SPR.0250PE	25	45	70	Perlon
D.SPR.0250ST	25	45	70	V2 A-Stahl
D.SPR.0300PE	30	45	70	perlon
D.SPR.0300ST	30	45	70	V2 A-Stahl

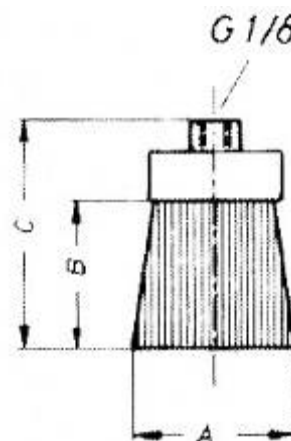

TYPE SPF


Socket of aluminium. Perlon bristles up to approx. 70 °C, for higher temperature steel bristles are being used. UNI SPF oil brushes are flat brushes that can be combined in various widths. Use one drip feed lubricator for each connection to ensure a uniform oil film. For the lubrication of surfaces, belts or chains.

Type	Presentation
D.SPF.0570PE	perlon
D.SPF.0570ST	Steel
D.SPF.0570BR	Bronze
D.SPF.1140PE	Perlon
D.SPF.1140ST	V2 A-Stahl
D.SPF.1140BR	bronze
D.SPF.1710PE	perlon
D.SPF.1710ST	V2 A-Stahl
D.SPF.1710BR	bronze

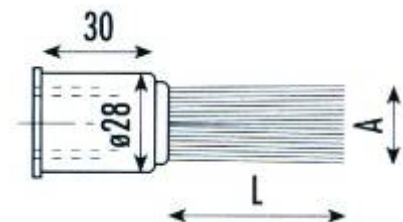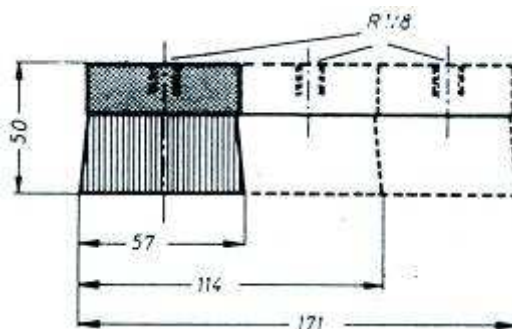

Round wire brush 1/4"

Type	A	L	Presentation
D.SIMA.B-2034	25	45	perlon

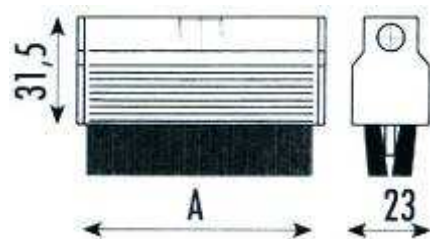

Wire brush 1/4"

Type	A	Presentation
D.SIMA.B-2034	25	perlon
D.SIMA.B-2035	40	perlon
D.SIMA.B-2036	70	perlon
D.SIMA.B-2037	100	perlon
D.SIMA.B-2038	25	perlon


Subject to modification

ROLL LUBRICATION

Type RSM


For oiling of slide ways, chains, metal ropes etc. The combination with the electric UNI lubricators and the UNI drip feed lubricators enable you to install a reliable and inexpensive lubrication system. Perlon bristles up to approx. 70 °C, for higher temperature steel bristles are being used.

Type	A	B	C	Presentation
D.RSM.80PE	80	127	25	Perlon
D.RSM.80ST	80	127	25	Steel

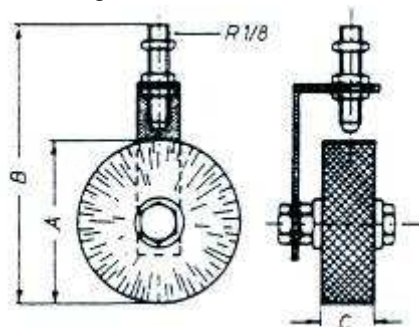

Type RSM - B (with internal alimentation)


For the lubrication of your chains, metal ropes and belts. The UNI roller lubrication RSM - B can be used wherever there is not enough space to fit the proven RSM 80 roller lubrication. the lubricant is supplied through the contral axis of the roller brush, protected against contamination. The holder being designed for a practical installation permits an adjustment of the roller brush even after complete fitting. Material: Nickered brass, V2A, aluminium. Perlon bristles for temperatures up to 70 °C. Steel bristles for higher temperatures.

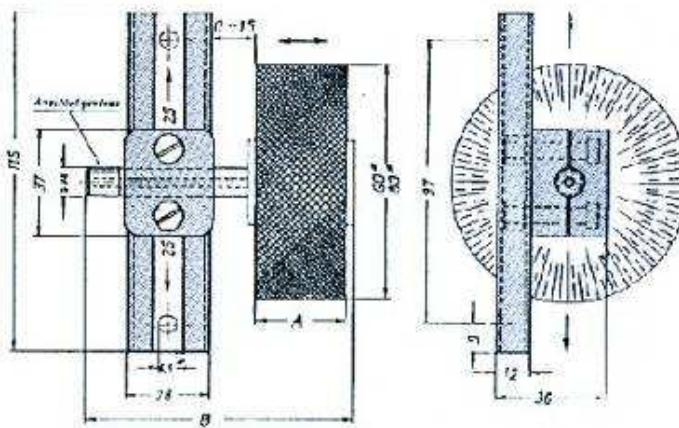

Type	A	B	Type
RSM-B 60/20	20	74	RSM-B 80/20
RSM-B 60/25	25	82	RSM-B 80/25
RSM-B 60/30	30	91	RSM-B 80/30
RSM-B 60/40	40	99	RSM-B 80/40

Mounting bracket angle for RSM - B

The adjustment possibilities of the functional RSM - B installation aid are enhanced by oblong holes. Surface-protected by black stove-enamel finish.

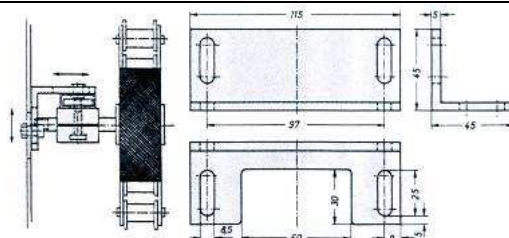

Subject to modification




BVBA POMAC-LUB-SERVICES SPRL Korte Bruggestraat 28 B-8970 Poperinge
Tel. 057/33 48 36 – Fax 057/33 61 27 info@pomac.be – internet: www.pomac.be

PINSELHALTER - ZÜBEHOR BRUSH HOLDERS – ACCESSOIRES

PHA PINSELHALTER MESSING / PHA BRUSH HOLDER BRASS

Höhe verstellbar durch Klemmvorrichtung / Thread for height adjustment


Type	A	B	Gewinde
Type			Thread
PHA 60	60	47	G 1/8
PHA 80	80	47	G 1/8
PHA 120	120	47	G 1/8



PHB PINSELHALTER MESSING / PHB BRUSH HOLDER BRASS

Höhe verstellbar durch Klemmvorrichtung – Zur befestigung auf einer Montageschiene, schwenkbar
Clamping device for height adjustment – For fasting on mounting rail, pivoting

Type	A	B	Gewinde
Type			Thread
PHB 60	60	30	G 1/8
PHB 80	80	30	G 1/8
PHB 120	120	30	G 1/8




PHC PINSELHALTER MESSING / PHC BRUSH HOLDER BRASS

Starre Ausführung in Klemmvorrichtung – Höhenverstellbar
Stationary version in clamping device – Height adjustable

Type	A	B	Gewinde
Type			Thread
PHC 60	60	30	G 1/8
PHC 80	80	30	G 1/8
PHC 120	120	30	G 1/8


BEFESTIGUNGSWINKEL MOUNTING BRACKET

Für PHA / For PHA



MONTAGESCHIENE TS 11 MOUNTING RAIL TS 11

Für PHB und PHC / For PHB and PHC



GLANDS FOR BRUSH HOLDERS VERSCHRAUBUNGEN FÜR PINSELHALTERS


Type	G	Ø
D.GAV.6LG02 (recht-droit)	1/8	6
D.WAV.6LG02 (haaks-coudé)	1/8	6

Ø 6 mm





COUPLINGS FOR BRUSH HOLDERS VERSCHRAUBUNGEN FÜR PINSELHALTERS

Type	G	Ø
CK.GE.04LLR02	1/8	4
CK.WE.04LLR02	1/8	4
FI.270.2XR02M	1/8	



G 1/8



Subject to change – Änderungen vorbehalten

U:\Algemeen\TECHINFO PDF\OLIEDRUPPELAARS\D-018-4-DE-ml.DOC

D-018-4-DE