



PNEUMATIC SOLENOID VALVE FOR PUMPS FOR CENTRAL LUBRICATION

3/2-Way solenoid valve

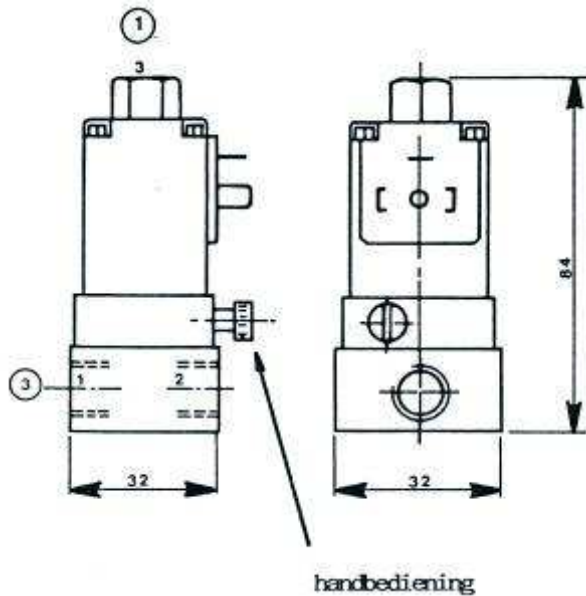


Type 3.04.18
Normally closed

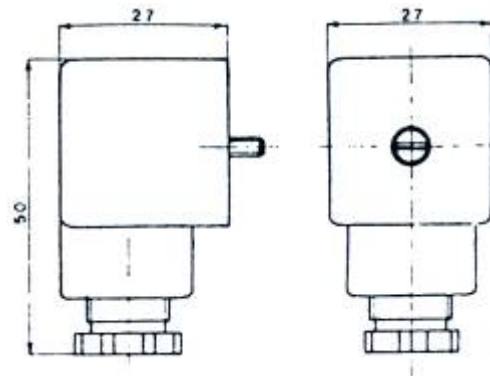


Plug
Type 3.05.04.90.18

baseplate

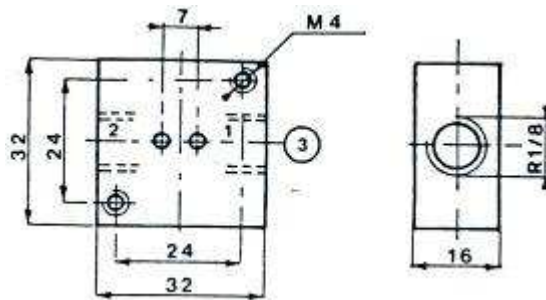

Straight flow path
(type 3.00.04.00)

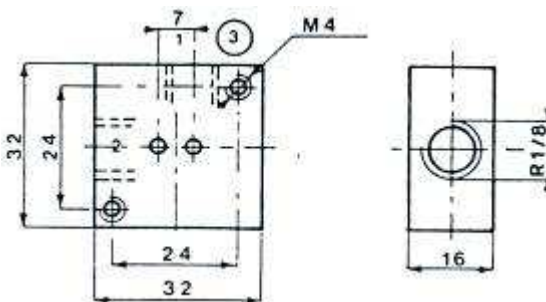

Perpendicular flow path
(type 3.00.04.90)

TECHNICAL FEATURES

Fluid: compressed air
Body material: plastic
Duty cycle: 100%
Voltage tolerance: 10%
Oriface: Ø 2 mm
Pressure range: 0 – 10 bar
Electric power consumption: 8 W
Rating: IP 65
Ambient temperature: -20°C +90°C
Flowrate: QNn 120L/min.
Port connection: G 1/8
Plug: DIN A 43 650
Operation voltage: 24V of 220V/50Hz
24V =

Subject to modifications